

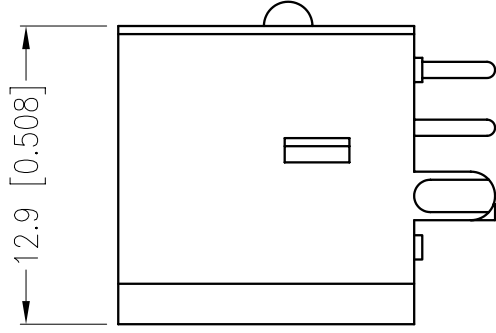


STANDARD TYPE

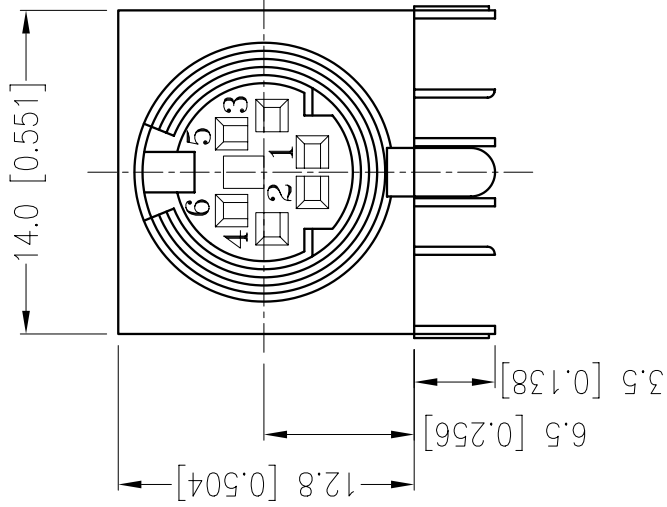

- SPECIFICATIONS:
- RATING: 100V AC 1A MAX OR 12V DC 2A MAX
  - INSULATION RESISTANCE: 50 MOHM MIN AT 250V DC
  - DIELECTRIC STRENGTH: 250V AC, 1 MINUTE
  - CONTACT RESISTANCE: 30 mOHM MAX
  - INSERTION FORCE: 4.5KG MAX
  - WITHDRAWAL FORCE: 0.9KG~3KG

FOOTPRINT (BOTTOM VIEW)

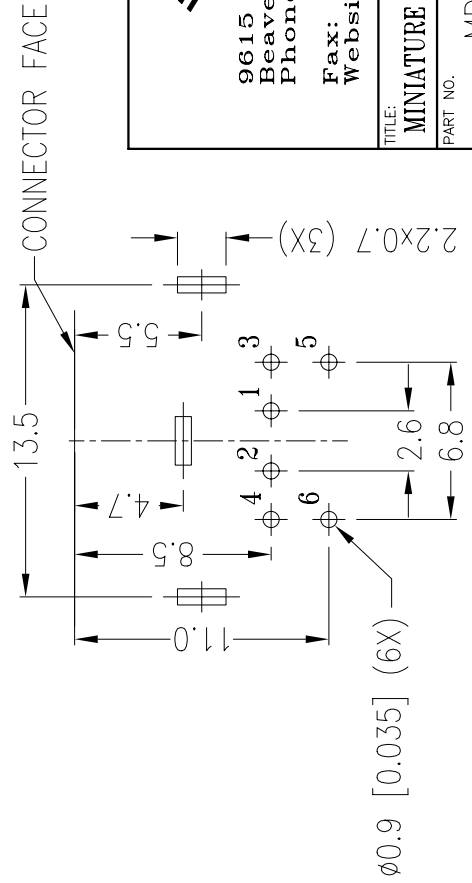

9615 SW Allen, Suite 103  
 Beaverton, OR 97005  
 Phone: (503) 643-4899  
 800-275-4899  
 Fax: (503) 643-6129  
 Website: www.cuistack.com

TITLE: <b>MINIATURE CIRCULAR CONNECTOR WITH SHIELD</b>	
PART NO. MD-60SM	UNITS: MM [INCHES]
DRAWN BY:	APPROVED BY:
	SCALE: 3X